

**Copeland**<sup>®</sup>  
**EazyCool**<sup>™</sup>

**Copeland EazyCool<sup>™</sup> Condensing Units  
Network Selection**



**Go!**



# Copeland EazyCool™ Condensing Units: Network Selection

## Required system


Total capacity	40 kW	Number of units	2
Evaporating temperature	-10°C	Suction gas temperature	20°C
Ambient temperature	32°C	Refrigerant	R404A

## Selected system at specified operating point, 50Hz

Master	OMQ-92-NLO-TWD	Slave	OMQ-92-NL-TWD
Capacity [kW]	20.51	Capacity [kW]	20.51
Quantity	1	Quantity	1
Total capacity [kW]		41.02	
Steps		2	
Application range		Medium temperature	



7.5-15 hp

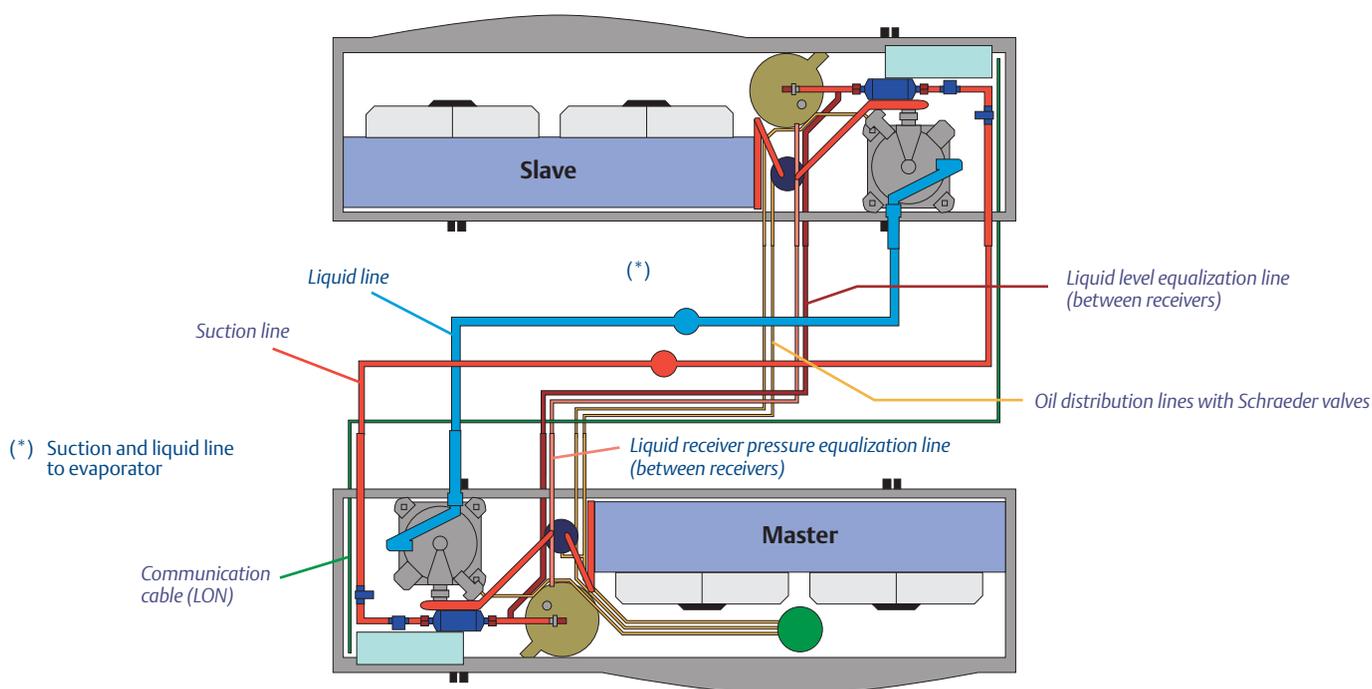

Copeland Standard Delivery	Quantity
Master unit: OMQ-92-NLO-TWD	1x
Slave unit: OMQ-92-NL-TWD	1x
Communication cable (LON), 4m <sup>(1)</sup>	1x
Oil line kit (2m) <sup>(1)</sup>	1x

Tubing on site (provided by third party)	Quantity
Suction line incl. insulation	1x
Liquid level equalization line (28mm - 1 1/8")	1x
Liquid receiver gas pressure equalization line (16mm - 5/8")	1x
Liquid line	1x

<sup>(1)</sup> Available as option only

C1.1.3/0105/E



Copeland Marketing & Sales - 27, Rue des Trois Bourdons - B 4840 Welkenraedt, Belgium  
Tel. +32 (0) 87 305411 - Fax +32 (0) 87 305506 - internet: www.ecopeland.com

